

Storm Glasswashers



FEATURES

- High grade 304 stainless steel construction
- Pressed tank and rounded corners to aid cleaning of machine
- Double skin door for quieter running and improved efficiency
- Rotating wash and rinse arms removable for cleaning
- Automatic detergent and rinse aid dosing
- 3 cycles - 90/120/180 secs
- Thermo-stop** ensures a hot rinse temperature on every cycle
- Adjustable wash and rinse thermostats
- ¾" BSP water inlet hose included
- UK 13A plug fitted
- STORM50 models - can be upgraded by changing mains supply cable to 30A single phase or 15A 3phase power supply
- Supplied with 2x glass baskets and 1x cutlery holder
- Gravity and integral drain pump models available
- Manual COLD rinse option (STORM40 and 40DP models only)
- Cold or Hot water supply max 60°C at 2 – 4bar (excl. STORM40)


OPTIONAL EXTRAS

Manual water softener	F1-DEP12	
Auto water softener	CEPSS-1300	
Water inlet hose (1.5 metre)	P1-3510	
350mm x 350mm glass basket	B8-12024550	
400mm x 400mm glass basket	B8-12025069	
500mm x 500mm glass basket	B8-12025011	
Universal stand	G2-STU	

Note: If optional extras sold separately, there is a delivery charge of £10.95+ VAT

Thermo-stop

Thermo-stop feature ensures the cycle cannot be completed until the rinse water temperature has achieved sanitising temperatures above 82°C.

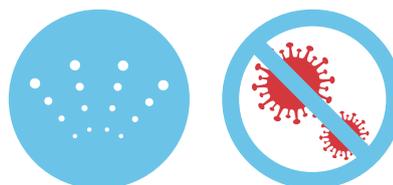

STORM35



STORM35DP



STORM40DP



STORM40



1
YEAR
WARRANTY

304
STAINLESS
STEEL

Blizzard™

Storm Glasswashers

Recessed door handle


Ergonomically designed door handle for easy opening and a flush finish.



Easy cleaning & maintenance

Easy to clean interior with rounded corners in wash tank, removable wash and rinse arms and specially designed wash filter (catches and contains debris within bottom flange).

Reducing the risk of debris falling into the wash pump or drain when the filter is removed for cleaning.



User-friendly control

Intuitive electro-mechanical control panel built with on/off and 3 cycle selection buttons.



IMPORTANT NOTES

If you are installing a glass or dishwasher in a hard water area, we recommend you to fit a water softener. Faults attributed to poor water quality are not covered under the manufacturer's warranty.

F1-DEP12



STORM50



STORM50DP



MODEL	PIECES /CYCLE	GLASS MAX HEIGHT	WATER USAGE	BASKET SIZE (mm)	EXT. DIMENSIONS (H x W x D mm)	POWER CONSUMPTION	WEIGHT (kg)	RRP
STORM35	13 pint glasses	220mm	2L	350 x 350	650 x 430 x 475	2.7 KW	37	
STORM35DP	13 pint glasses	220mm	2L	350 x 350	650 x 430 x 475	2.7 KW	40	
STORM40	16 pint glasses	270mm	2.5L	400 x 400	720 x 470 x 520	2.7 KW	44	
STORM40DP	16 pint glasses	270mm	2.5L	400 x 400	720 x 470 x 520	2.7 KW	47	
STORM50	25 pint glasses	320mm	2.7L	500 x 500	820 x 600 x 600	2.6KW (* 6.2KW)	67	
STORM50DP	25 pint glasses	320mm	2.7L	500 x 500	820 x 600 x 600	2.6KW (* 6.2KW)	70	
Power conversion charge (STORM50)								

based on 90mm diameter pint glass

* Can be upgraded by changing mains supply cable to 30A single phase or 15A 3phase power supply



See page 205 for optional stands

